



Recessed Carbon Sparcaps in Composite Wings

Conforming sanding block
(assemble with rubber cement)

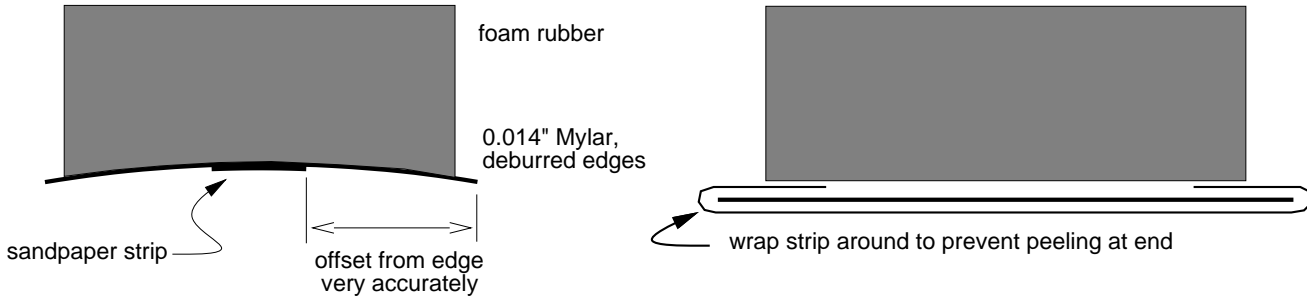


220 Al-oxide (light brown) sandpaper is perfect thickness for two layers of 2.9 oz webbed uni carbon

Sand recesses into core, sliding block against stuck-down straightedge

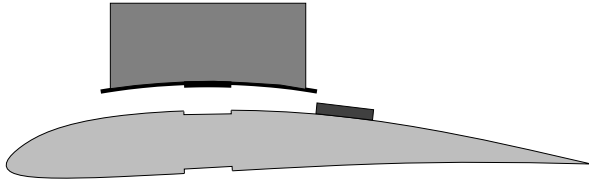

Use two passes to make tapered-width recess

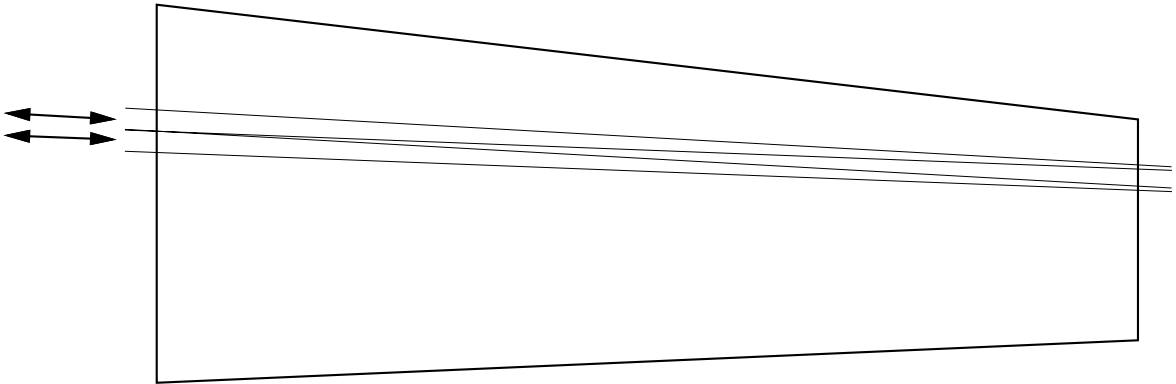

Wet out and apply CF caps to core before enclosing in Mylar + skin

